



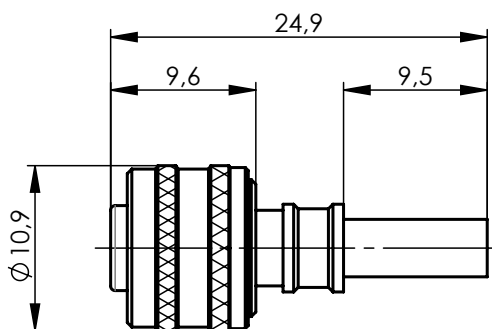

M 1:1



Mechanical characteristics

cables

interface dimensions acc. to assembly instruction

centre conductor

outer conductor

mating life

Components

center contact

crimp ferrule

other metal parts

insulator

o-ring

Electrical characteristics

impedance

frequency

return loss

voltage proof

Environmental

operating temp.

RoHS compliant

Mechanische Eigenschaften

Kabel

Steckgesicht nach Montageanleitung

Innenleiter

Außenleiter

Steckzyklen

Bauteile

Innenkontakt

Crimprohr

sonstige Metallteile

Isolierung

O-Ring

Elektrische Eigenschaften

Wellenwiderstand

Frequenz

Rückflusdämpfung

Prüfspannung

Umgebung

Betriebstemperatur

RoHS konform

G7 (RG-316): KX 22A; KX3B; MRC 100 Flex;
RG-174/U; RG-188A/U; RG-316/U

1.5-3.5 (Push Pull)

C5924

crimp

crimp

>100

Material / Material

brass / Messing

copper / Kupfer

brass / Messing

PTFE

silicone

Finish / Oberfläche

NiP-Au

CuSnZn3

CuSnZn3

50 Ω

0-6 GHz

typ.: at/bis 2 GHz - 32dB


at/bis 4 GHz - 25dB

at/bis 6 GHz - 20dB

1 kV_{eff} / 50 Hz

-55°C / +90°C

2011/65/EU

Änd./ rev. index	Änderungs-Nr. / revision code	Datum/ date	Name/ name		Datum/ date	Name/ name	Gewicht/ weight [g]	
				gez./ drawn	16.03.2023	PU		
				gepr./ appr.	23.03.2023	SST	ca./approx.	
							4	
				Maßstab/ scale	Benennung/ title			 Telegärtner
				2:1 (1:1)	1.5-3.5 Plg PP str cr/cr G7 1.5-3.5 Plg PP str cr/cr G7			
				untol. Maße/ dim. without tolerances according to	Untert./ doc. type	Materialnr./ material no.		 Maße/ dimensions: mm
				CUG		100033464		
				Ersatz für/ replaces	PDM Nr./ pdm no. J01480A3013			Original : DIN A4
								Blatt/ sheet 1 von/ of 1

α 500000000980 16.03.2023 PU